



S J P N Trust's

Hirasugar Institute of Technology, Nidasoshi.

Inculcating Values, Promoting Prosperity

Approved by AICTE, Recognized by Govt. of Karnataka and Affiliated to VTU Belagavi

ECE Dept.

NS

VIII Sem

2017-18

Department of Electronics & Communication Engg.

Course : Network Security

Sem.: 8th (2017-18 EVEN)

Course Coordinator:

Prof. Nyamatulla M Patel

CRYPTOGRAPHY AND NETWORK SECURITY

Unit-08

Firewalls



Firewalls

Introduction

- everyone want to be on the Internet
- and to interconnect networks
- has persistent security concerns
 - can't easily secure a system
- typically use a **Firewall**
- to provide **perimeter defence**
- as part of comprehensive security strategy

What is a Firewall?

- a **choke point** of control and monitoring
- interconnects networks with differing trust
- imposes restrictions on network services
 - only authorized traffic is allowed
- auditing and controlling access
 - can implement alarms for abnormal behavior
- provide NAT & usage monitoring
- implement VPNs using IPSec


Firewall Limitations

- cannot protect from attacks bypassing it
 - E.g., sneaker net, utility modems, trusted organisations, trusted services (eg SSL/SSH)
- cannot protect against internal threats
 - eg disgruntled or colluding employees
- cannot protect against transfer of all virus infected programs or files
 - because of huge range of O/S & file types

Firewalls – Packet Filters

- simplest, fastest firewall component
- foundation of any firewall system
- examine each IP packet (no context) and permit or deny according to rules
- hence restrict access to services (ports)
- possible default policies
 - that not expressly permitted is prohibited
 - that not expressly prohibited is permitted

Firewalls – Packet Filters

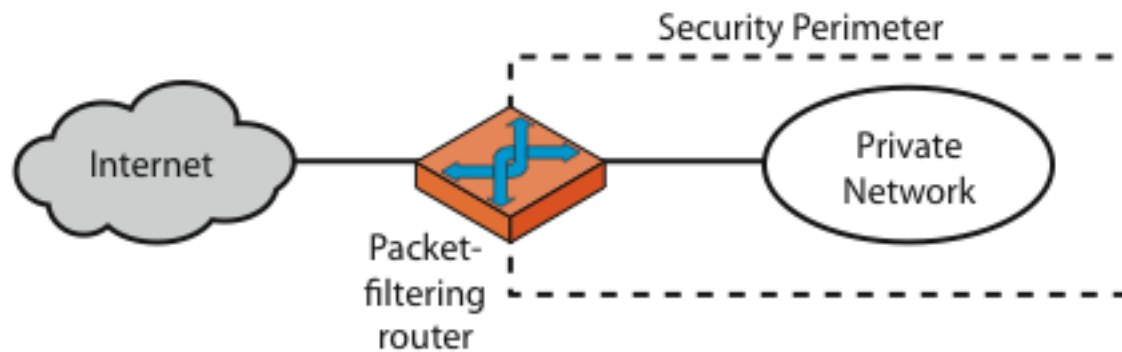

(a) Packet-filtering router

Firewalls – Packet Filters

Table 20.1 Packet-Filtering Examples

A

action	ourhost	port	theirhost	port	comment
block	*	*	SPIGOT	*	we don't trust these people
allow	OUR-GW	25	*	*	connection to our SMTP port

B

action	ourhost	port	theirhost	port	comment
block	*	*	*	*	default

C

action	ourhost	port	theirhost	port	comment
allow	*	*	*	25	connection to their SMTP port

D

action	src	port	dest	port	flags	comment
allow	{our hosts}	*	*	25		our packets to their SMTP port
allow	*	25	*	*	ACK	their replies

E

action	src	port	dest	port	flags	comment
allow	{our hosts}	*	*	*		our outgoing calls
allow	*	*	*	*	ACK	replies to our calls
allow	*	*	*	>1024		traffic to nonsevers

Attacks on Packet Filters

- IP address spoofing
 - fake source address
 - authenticate
- source routing attacks
 - attacker sets a route other than default
 - block source routed packets
- tiny fragment attacks
 - split header info over several tiny packets
 - either discard or reassemble before check


Firewalls – Stateful Packet Filters

- traditional packet filters do not examine higher layer context
 - i.e., matching return packets with outgoing flow
- stateful packet filters address this need
- they examine each IP packet in context
 - keep track of client-server sessions
 - check each packet validly belongs to one
- they are better able to detect bogus packets out of context

Firewalls - Application Level Gateway (or Proxy)

- have application specific gateway / proxy
- has full access to protocol
 - user requests service from proxy
 - proxy validates request as legal
 - then actions request and returns result to user
 - can log / audit traffic at application level
- need separate proxies for each service
 - some services naturally support proxying
 - others are more problematic

Firewalls - Application Level Gateway (or Proxy)

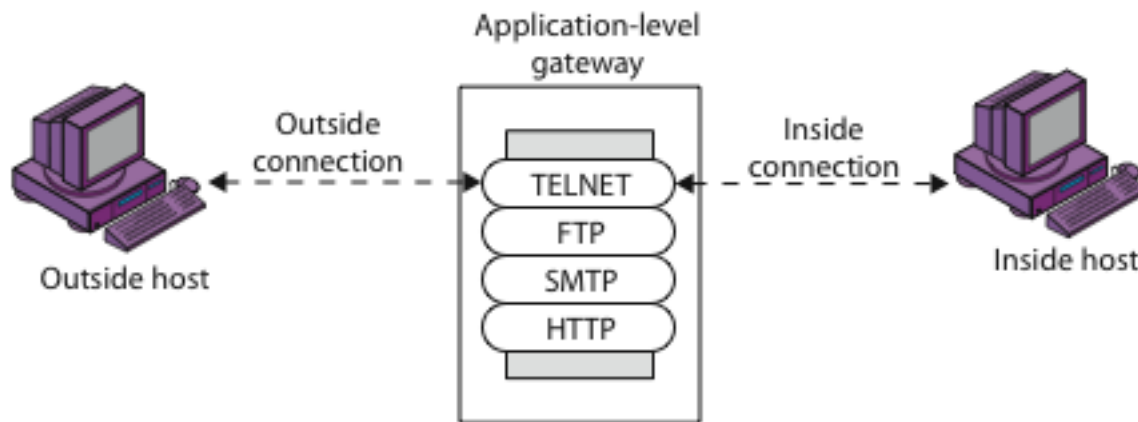


(b) Application-level gateway

Firewalls - Circuit Level Gateway

- relays two TCP connections
- imposes security by limiting what such connections are allowed
- once created usually relays traffic without examining contents
- typically used when trust internal users by allowing general outbound connections

Firewalls - Circuit Level Gateway

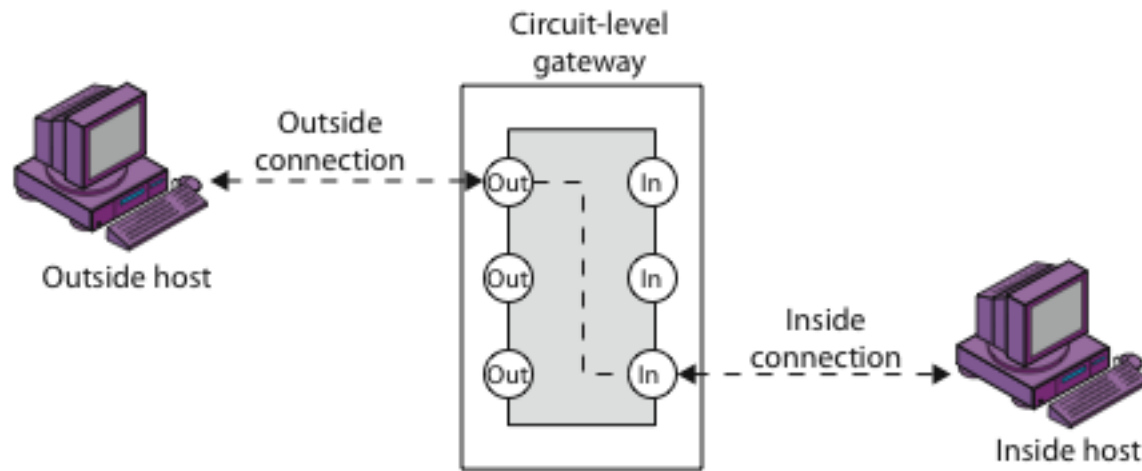


(c) Circuit-level gateway

Bastion Host


- highly secure host system
- runs circuit / application level gateways
- or provides externally accessible services
- potentially exposed to "hostile" elements
- hence is secured to withstand this
 - hardened O/S, essential services, extra auth
 - proxies small, secure, independent, non-privileged

Firewall Configurations

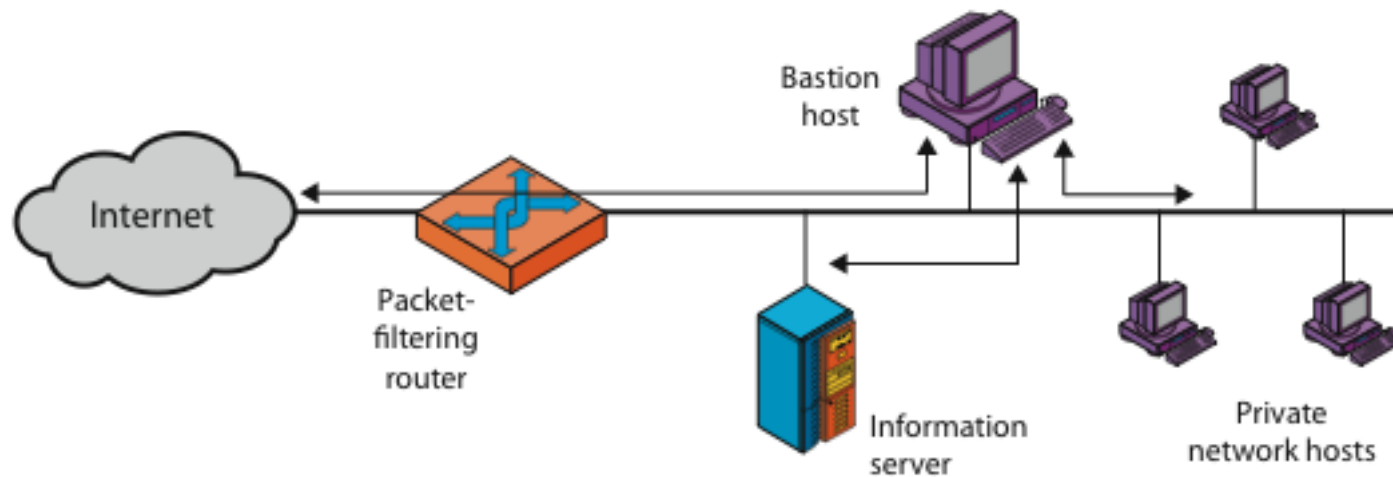


(a) Screened host firewall system (single-homed bastion host)

Firewall Configurations

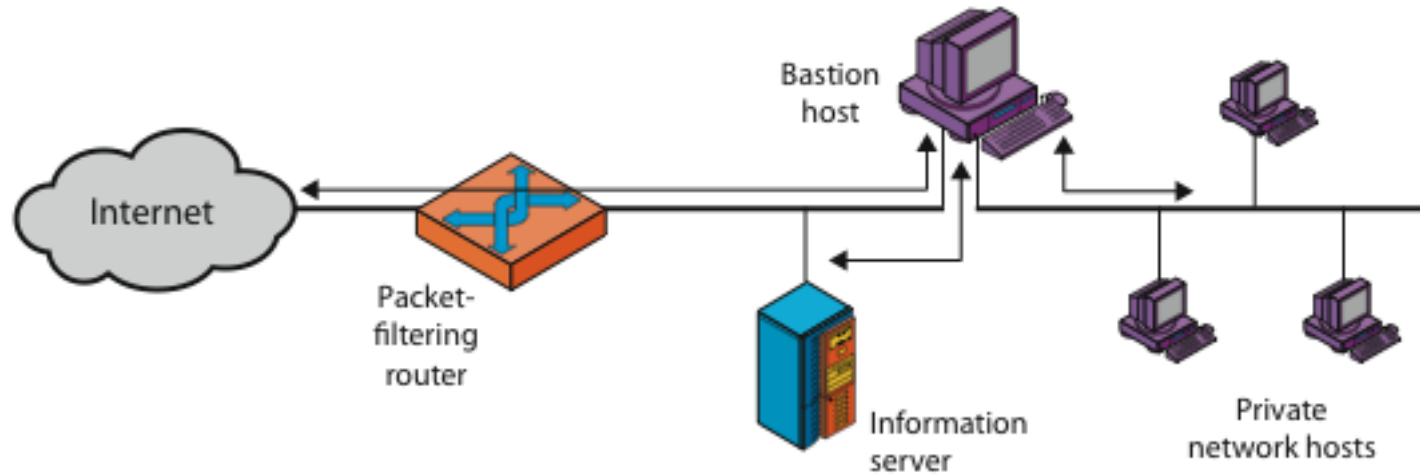

(b) Screened host firewall system (dual-homed bastion host)

Firewall Configurations

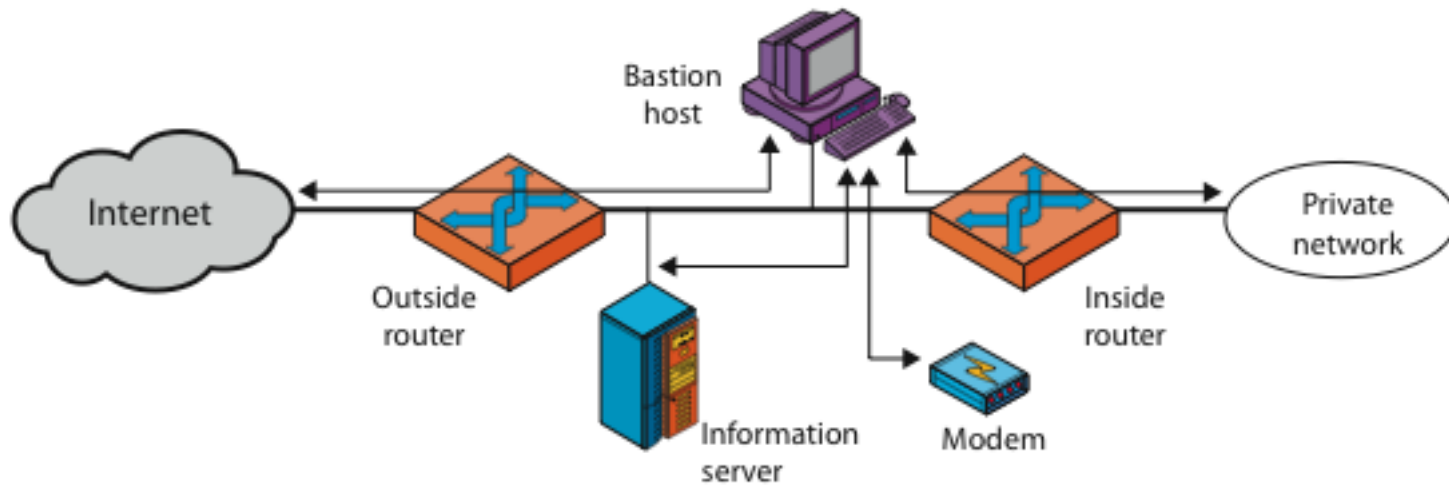

(c) Screened-subnet firewall system

Access Control

- determines what resources users can access
- general model is that of access matrix with
 - **subject** - active entity (user, process)
 - **object** - passive entity (file or resource)
 - **access right** – way object can be accessed
- can decompose by
 - columns as access control lists
 - rows as capability tickets

Access Control Matrix

	Program1	...	SegmentA	SegmentB
Process1	Read Execute		Read Write	
Process2				Read
⋮				
⋮				
⋮				

(a) Access matrix


Trusted Computer Systems

- information security is increasingly important
- have varying degrees of sensitivity of information
 - military info classifications: confidential, secret, etc
- subjects (people or programs) have varying rights of access to objects (information)
- known as multilevel security
 - subjects have **maximum** & **current** security level
 - objects have a fixed security level **classification**
- want to consider ways of increasing confidence in systems to enforce these rights

Bell LaPadula (BLP) Model

- has two key policies:
- **no read up** (simple security property)
 - a subject can only read an object if the current security level of the subject dominates (\geq) the classification of the object
- **no write down** (*-property)
 - a subject can only append/write to an object if the current security level of the subject is dominated by (\leq) the classification of the object

Reference Monitor

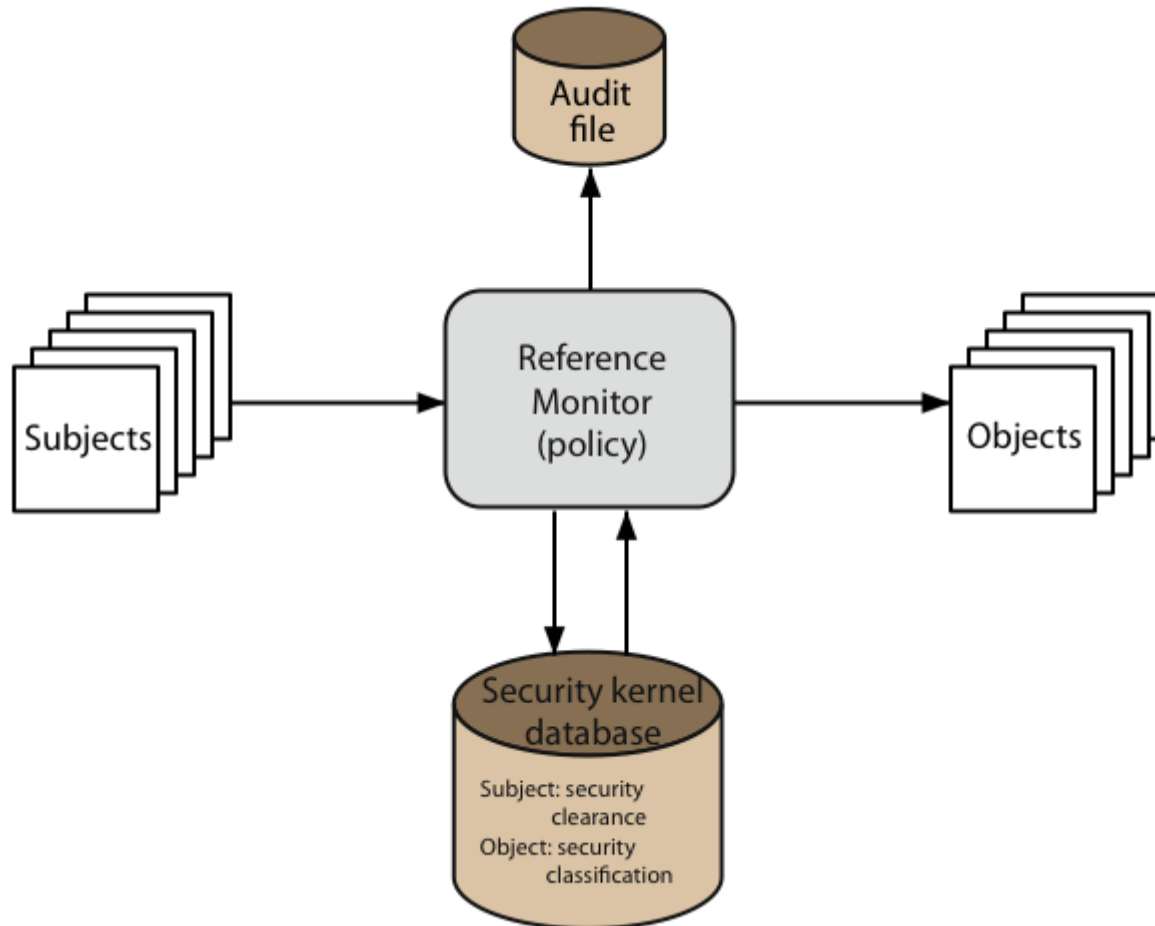

Summary

- have considered:
 - firewalls
 - types of firewalls
 - configurations
 - access control
 - trusted systems



Queries?

